




Near Water

ATLANTIS

NEAR WATER LED FIXTURES

Class III IP67 IK10

The Atlantis Near Water series is specially designed to light objects around pools, fountains, and water features or near the sea with high power LED light. The series is made of solid 316L stainless steel and can therefore withstand these rough environments. Standard finish is polished stainless steel to avoid collection of dirt and algae, but a brushed finish is also possible. The series comes as recessed, surface mount or spots. The spots are heavy duty with stainless steel brackets for sturdy fixing. A specially developed power cable ensures for a long lifetime in extreme conditions without any ingress of water. The low voltage electronic LED driver is housed in the base of the fixture. The LEDs used come in 3 different tones of white, as well as blue, red, green, amber or RGB. Several lenses from 6 to 40 degrees are available to choose from to achieve the desired the light effect.



- Frame**
316L Stainless Steel
- Body**
316L Stainless Steel
- Recessing Tube**
Aluminium
- Gaskets**
Silicone
- Diffusers**
Tempered Glass
- Screws**
Stainless Steel
- Mounting Brackets**
316L Stainless Steel

LEDs

Only highest quality LEDs such as CREE and Seoul Semiconductor are used in production allowing for maximum lumen output and maximum lifetime. Most LEDs run on 350mA or 700mA depending on how much light output is required. The white color temperature binning is 200K at most, and always on the same x,y coordinates on the CIE diagram in accordance with Energy Star. This ensures consistent supply of the same color temperature over time. As LEDs are constantly developing and becoming more efficient, lumen output given in this catalogue are current as of March 2014. At 2700K, 3300K, and 4500K LED lumen output per led is 75lm; at 6000K the lumen output per led is 115lm. Total Lighting Output as printed in this catalogue is the actual light output of the entire fixture. The minimum CRI of the LEDs used is 85 with a majority of products over 90.

“Customization” is EMFA’s standard

EMFA offers many combinations for each fixture, as all fixtures are made in house. A combination of 2 finishes of stainless steel, 8 LED colors, 2 wattages, and 5 or more lenses and reflectors are available to make the fixture suitable for the required application. This is done without increasing lead-time and is available for large as well as small quantities.



Thermal Management

All fixtures are designed to withstand ambient temperatures of at least 50°C. The LEDs are mounted on metal core pcbs, which are mounted to the aluminium body of the fixture so that the entire fixture acts as a heat sink. Extensive testing is performed in EMFA's laboratory to ensure these values are maintained so that the lifetime of the LED is not compromised.

ATLANTIS 1

NEAR WATER LED FIXTURES Class III IP67 IK10

With Recessing Tube

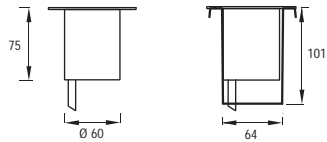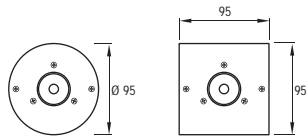

Aluminum
recessing tube






Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

1 x 350 mA (1 W) LED

Warm White	3300 K
Natural White	4500 K
Cool White	6000 K
Blue	
Red	
Amber	
Green	

Total Lighting Output	Code No	
	Round	Square
46 lm	412101	412111
46 lm	412106	412116
70 lm	412107	412117
	412102	412112
	412103	412113
	412104	412114
	412105	412115

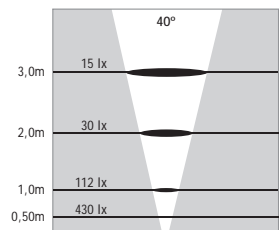
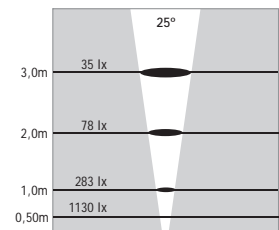
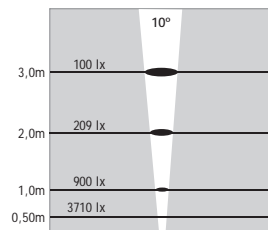


Lux levels for 3300K & 4500K

1 x 700 mA (3 W) LED

Warm White	3300 K
Natural White	4500 K
Cool White	6000 K
Blue	
Red	
Amber	
Green	

Total Lighting Output	Code No	
	Round	Square
83 lm	421221	421231
83 lm	421222	421232
126 lm	421223	421233
	421224	421234
	421225	421235
	421226	421236
	421227	421237

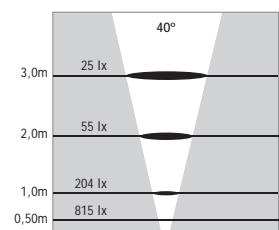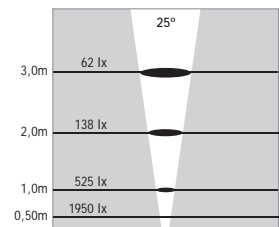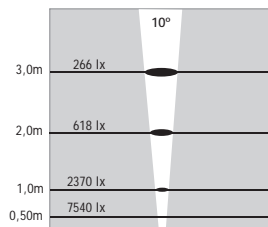


Lux levels for 3300K & 4500K

ATLANTIS 2

NEAR WATER RECESSED LED FIXTURES

Class III IP67 IK10



With Recessing Tube

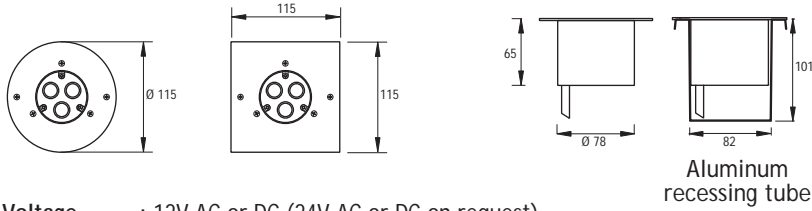

Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F






	3 x 350 mA (3 W) LED	Total Lighting Output	Code No	
			Round	Square
Warm White	3300 K	142 lm	412121	412131
Natural White	4500 K	142 lm	412126	412136
Cool White	6000 K	217 lm	412127	412137
Blue			412122	412132
Red			412123	412133
Amber			412124	412134
Green			412125	412135

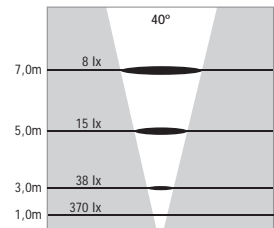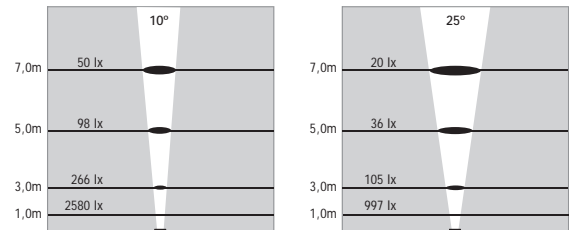

Lux levels for 3300K & 4500K

	3 x 700 mA (9 W) LED	Total Lighting Output	Code No	
			Round	Square
Warm White	3300 K	256 lm	421351	421361
Natural White	4500 K	256 lm	421352	421362
Cool White	6000 K	391 lm	421353	421363
Blue			421354	421364
Red			421355	421365
Amber			421356	421366
Green			421357	421367

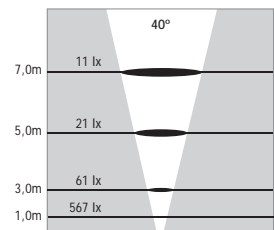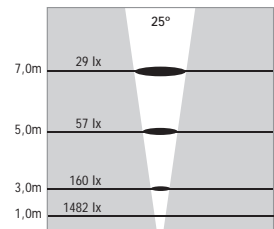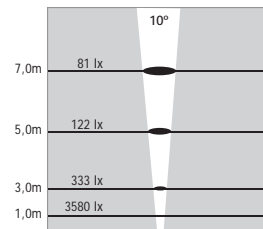


Lux levels for 3300K & 4500K

ATLANTIS 2

NEAR WATER RECESSED RGB LED FIXTURES

Class III IP67 IK10

With Recessing Tube


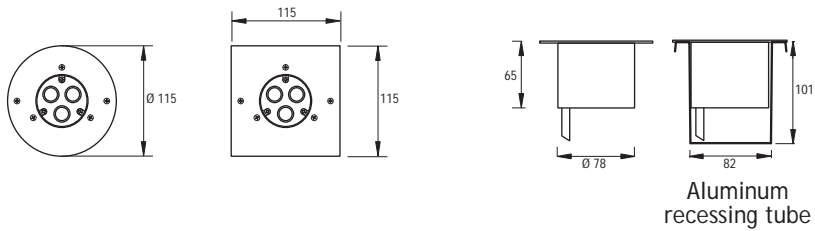


Voltage : 40V DC
 Lens : 25°, 40°
 Diffuser : 8 mm Clear Glass (Frosted Glass on request)
 Cable : Potted 10m 4x0,75 H03 VV-F

9 x 350 mA (9 W) RGB LED



Code No
 Round Square
 412141 412151

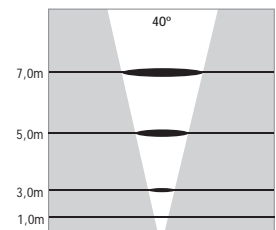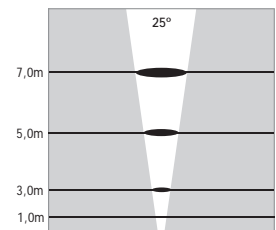


ATLANTIS 5

NEAR WATER RECESSED LED FIXTURES



Class III IP67 IK10

With Recessing Tube

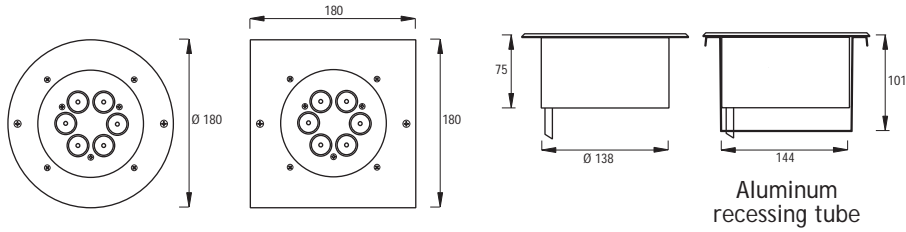




Voltage : 24V AC or DC on request
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

	6 x 350 mA (6 W) LED	Total Lighting Output	Code No	
			Round	Square
Warm White	3300 K	274 lm	412161	412171
Natural White	4500 K	274 lm	412166	412176
Cool White	6000 K	421 lm	412167	412177
Blue			412162	412172
Red			412163	412173
Amber			412164	412174
Green			412165	412175

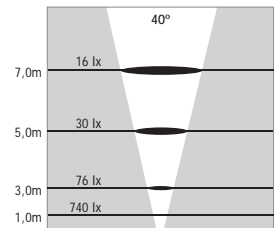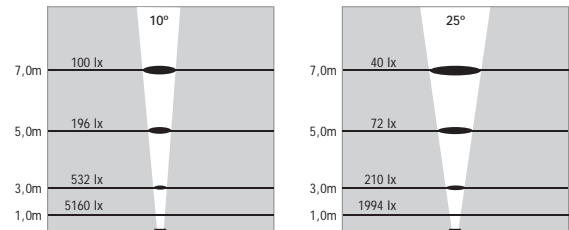

Lux levels for 3300K & 4500K

	6 x 700 mA (18 W) LED	Total Lighting Output	Code No	
			Round	Square
Warm White	3300 K	493 lm	421891	421901
Natural White	4500 K	493 lm	421892	421902
Cool White	6000 K	758 lm	421893	421903
Blue			421894	421904
Red			421895	421905
Amber			421896	421906
Green			421897	421907

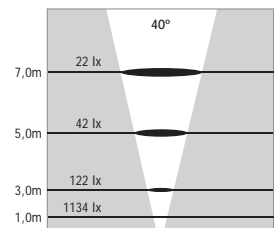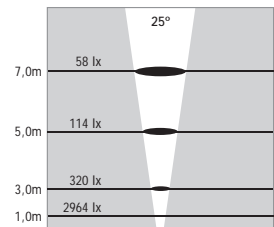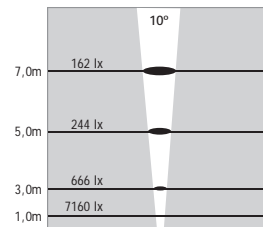


Lux levels for 3300K & 4500K

ATLANTIS 5 NEAR WATER RECESSED LED FIXTURES



Class III IP67 IK10

With Recessing Tube

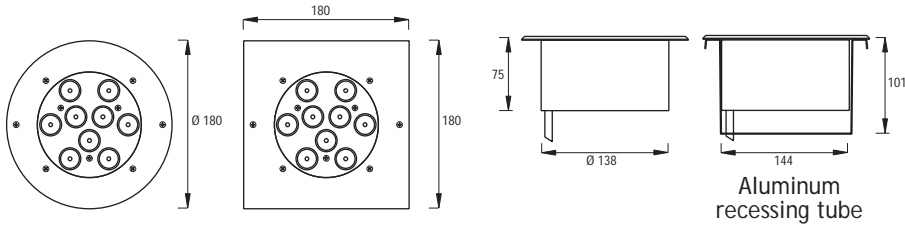




Voltage : 24V AC or DC on request
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

	9 x 350 mA (9 W) LED	Total Lighting Output	Code No	
			Round	Square
Warm White	3300 K	449 lm	412181	412191
Natural White	4500 K	449 lm	412186	412196
Cool White	6000 K	680 lm	412187	412197
Blue			412182	412192
Red			412183	412193
Amber			412184	412194
Green			412185	412195

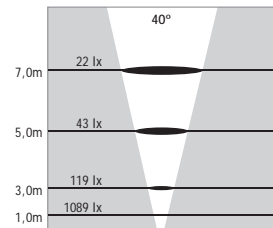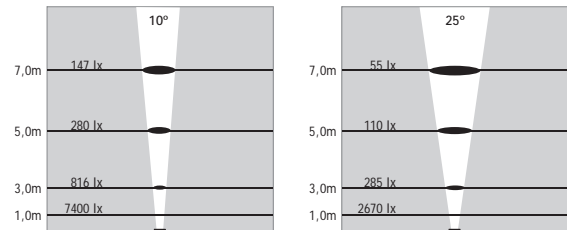

Lux Levels for 3300K & 4500K

	9 x 700 mA (27 W) LED	Total Lighting Output	Code No	
			Round	Square
Warm White	3300 K	808 lm	421911	421921
Natural White	4500 K	808 lm	421912	421922
Cool White	6000 K	1224 lm	421913	421923
Blue			421914	421924
Red			421915	421925
Amber			421916	421926
Green			421917	421927

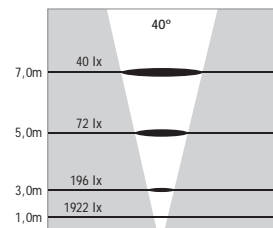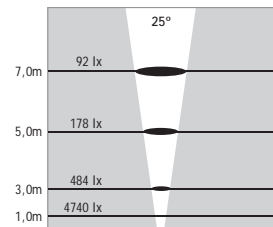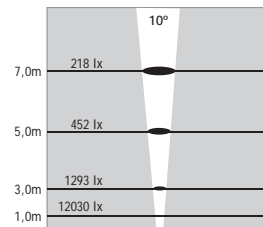


Lux Levels for 3300K & 4500K

ATLANTIS 27

NEAR WATER RECESSED RGB LED FIXTURE Class III IP67 IK10

With Recessing Tube


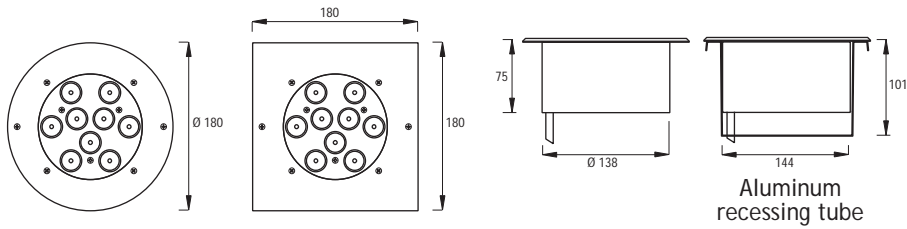


- Voltage : 40V DC
- Lens : 25°, 40°
- Diffuser : 8 mm Clear Glass (Frosted Glass on request)
- Cable : Potted 10m 4x0,75 H03 VV-F

27 x 350 mA (30 W) RGB LED



Code No
Round Square
412201 412211


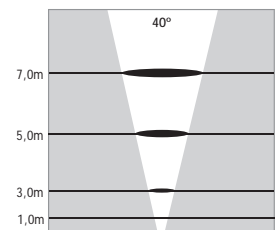
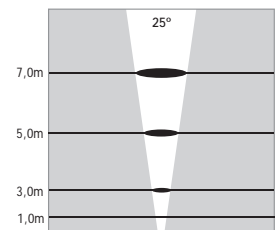


ATLANTIS 1

NEAR WATER SURFACE MOUNTED LED FIXTURES

Class III IP67 IK10




Cable exits from bottom Cable exits from side



Voltage : 12V AC or DC (24V AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

1 x 350 mA (1 W) LED




		Total Lighting Output	Code No
Warm White	3300 K	46 lm	412221
Natural White	4500 K	46 lm	412226
Cool White	6000 K	70 lm	412227
Blue			412222
Red			412223
Amber			412224
Green			412225

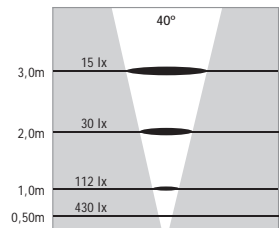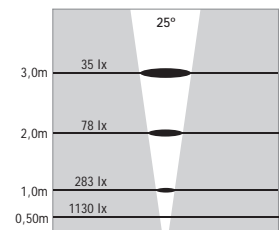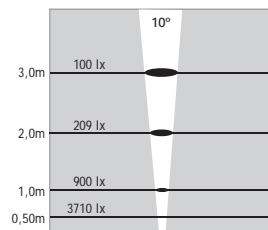

Lux levels for 3300K & 4500K

1 x 700 mA (3 W) LED

		Total Lighting Output	Code No
Warm White	3300 K	83 lm	421241
Natural White	4500 K	83 lm	421242
Cool White	6000 K	126 lm	421243
Blue			421244
Red			421245
Amber			421246
Green			421247

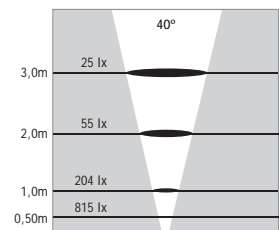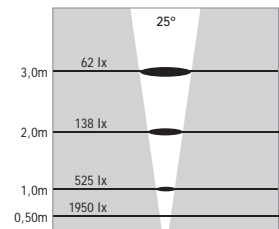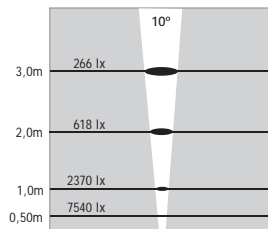


Lux levels for 3300K & 4500K

ATLANTIS 2



NEAR WATER SURFACE MOUNTED LED FIXTURES

Class III IP67 IK10

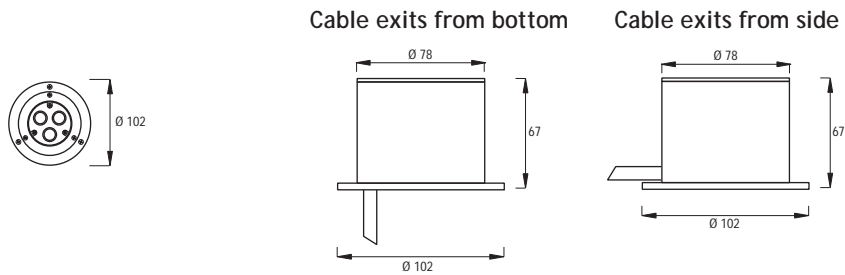




Voltage : 12V AC or DC (24 AC or DC on request)
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

3 x 350 mA (3 W) LED		Total Lighting Output	Code No
Warm White	3300 K	142 lm	412231
Natural White	4500 K	142 lm	412236
Cool White	6000 K	217 lm	412237
Blue			412232
Red			412233
Amber			412234
Green			412235

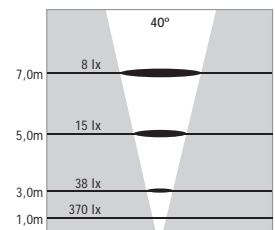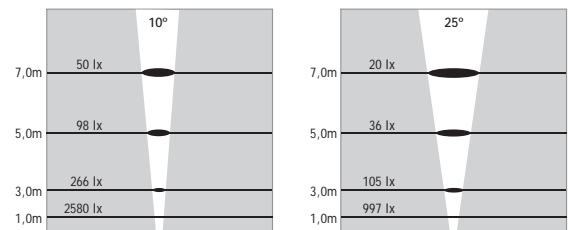

Lux levels for 3300K & 4500K

3 x 700 mA (9 W) LED		Total Lighting Output	Code No
Warm White	3300 K	256 lm	421371
Natural White	4500 K	256 lm	421372
Cool White	6000 K	391 lm	421373
Blue			421374
Red			421375
Amber			421376
Green			421377

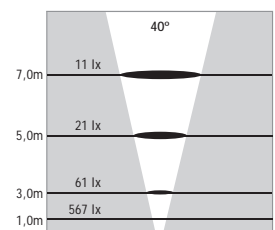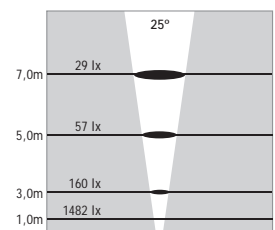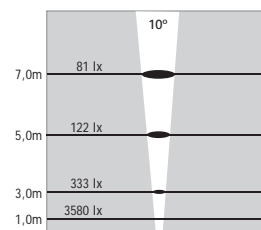


Lux levels for 3300K & 4500K

ATLANTIS 2


NEAR WATER SURFACE MOUNTED RGB LED FIXTURE Class III IP67 IK10



Cable exits from bottom



Cable exits from side





- Voltage : 40V DC
- Lens : 25°, 40°
- Diffuser : 8 mm Clear Glass (Frosted Glass on request)
- Cable : Potted 10 m 4x0,75 H03 VV-F

9 x 350 mA (9 W) RGB LED




Code No
412241

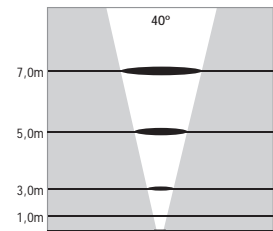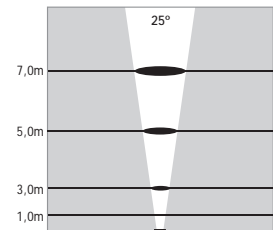



ATLANTIS 5

NEAR WATER SURFACE MOUNTED LED FIXTURES

Class III IP67 IK10






Cable exits from bottom Cable exits from side



- Voltage : 24V AC or DC on request
- Lens : 10°, 25°, 40°
- Diffuser : 8 mm Clear Glass (Frosted Glass on request)
- Cable : Potted 5 m 2x0,75 H03 VV-F

6 x 350 mA (6 W) LED




		Total Lighting Output	Code No
Warm White	3300 K	274 lm	412251
Natural White	4500 K	274 lm	412256
Cool White	6000 K	421 lm	412257
Blue			412252
Red			412253
Amber			412254
Green			412255

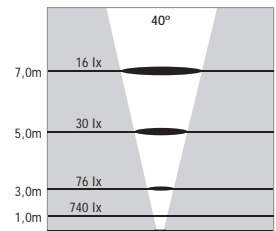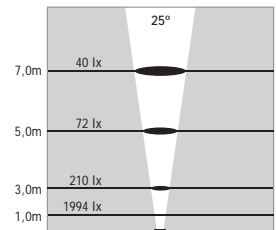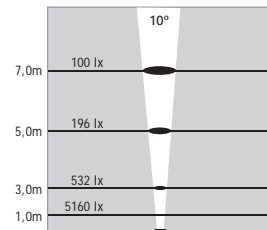

Lux levels for 3300K & 4500K

6 x 700 mA (18 W) LED

		Total Lighting Output	Code No
Warm White	3300 K	493 lm	421931
Natural White	4500 K	493 lm	421932
Cool White	6000 K	758 lm	421933
Blue			421934
Red			421935
Amber			421936
Green			421937

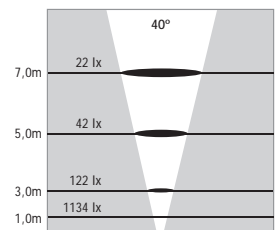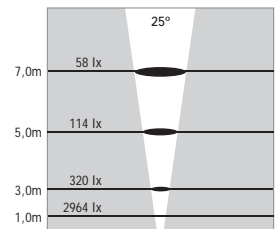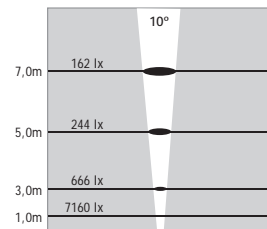


Lux levels for 3300K & 4500K



ATLANTIS 5

NEAR WATER SURFACE MOUNTED LED FIXTURES

Class III IP67 IK10






Cable exits from bottom Cable exits from side



- Voltage : 24V AC or DC on request
- Lens : 10°, 25°, 40°
- Diffuser : 8 mm Clear Glass (Frosted Glass on request)
- Cable : Potted 5 m 2x0,75 H03 VV-F

9 x 350 mA (9 W) LED




		Total Lighting Output	Code No
Warm White	3300 K	449 lm	412261
Natural White	4500 K	449 lm	412266
Cool White	6000 K	680 lm	412267
Blue			412262
Red			412263
Amber			412264
Green			412265

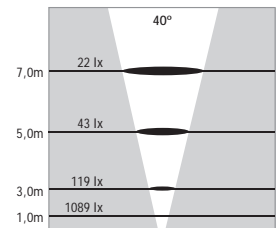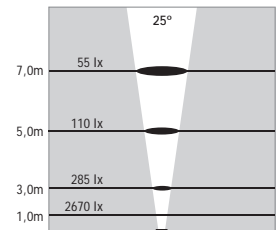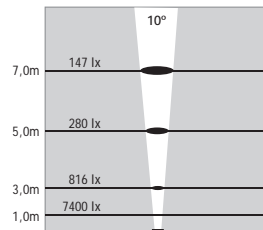

Lux levels for 3300K & 4500K

9 x 700 mA (27 W) LED


		Total Lighting Output	Code No
Warm White	3300 K	808 lm	421941
Natural White	4500 K	808 lm	421942
Cool White	6000 K	1224 lm	421943
Blue			421944
Red			421945
Amber			421946
Green			421947

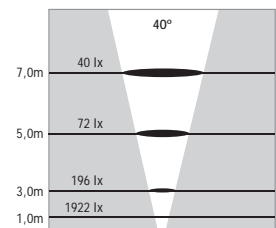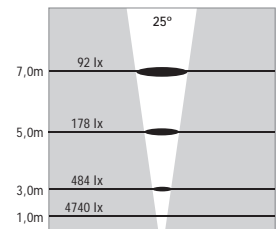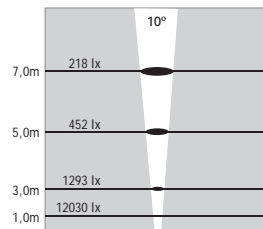



Lux levels for 3300K & 4500K

ATLANTIS 27

NEAR WATER SURFACE MOUNTED RGB LED FIXTURE
Class III IP67 IK10



Cable exits from bottom Cable exits from side





- Voltage : 40V DC
- Lens : 25°, 40°
- Diffuser : 8 mm Clear Glass (Frosted Glass on request)
- Cable : Potted 10 m 4x0,75 H03 VV-F

27 x 350 mA (30 W) RGB LED




Code No
412271

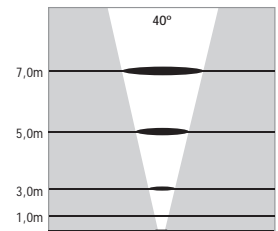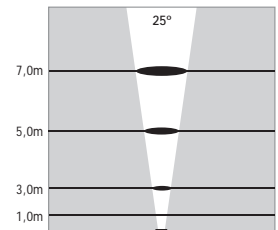




ATLANTIS 1

NEAR WATER LED SPOTS Class III IP67 IK10







Voltage : 12V AC or DC (24V AC or DC on request)
 Lens : 10°, 25°, 40°
 Diffuser : 8 mm Clear Glass (Frosted Glass on request)
 Cable : Potted 5 m 2x0,75 H03 VV-F

1 x 350 mA (1 W) LED		Total Lighting Output	Code No
Warm White	3300 K	46 lm	412281
Natural White	4500 K	46 lm	412286
Cool White	6000 K	70 lm	412287
Blue			412282
Red			412283
Amber			412284
Green			412285

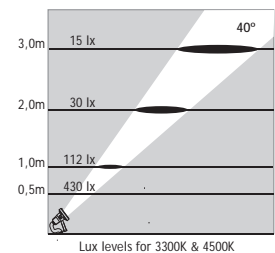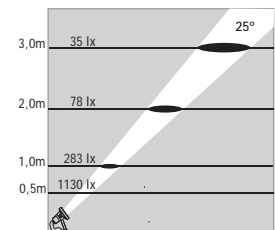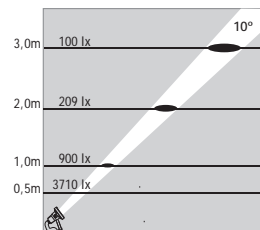

1 x 700 mA (3 W) LED		Total Lighting Output	Code No
Warm White	3300 K	83 lm	421251
Natural White	4500 K	83 lm	421252
Cool White	6000 K	126 lm	421253
Blue			421254
Red			421255
Amber			421256
Green			421257

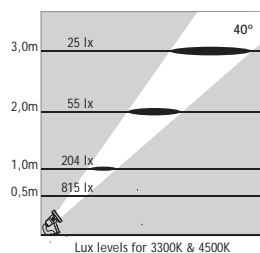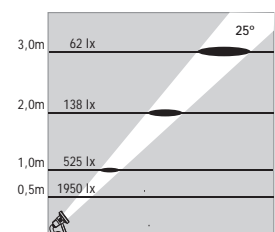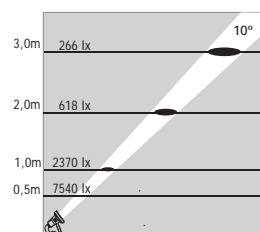


Available also with stainless steel picket for ground mounting

ATLANTIS 1

NEAR WATER LED SPOTS




Class III IP67 IK10



Voltage : 24V AC or DC
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F





1 x 350 mA (1 W) LED

		Total Lighting Output	Code No
Warm White	3300 K	46 lm	421261
Natural White	4500 K	46 lm	421262
Cool White	6000 K	70 lm	421263
Blue			421264
Red			421265
Amber			421266
Green			421267

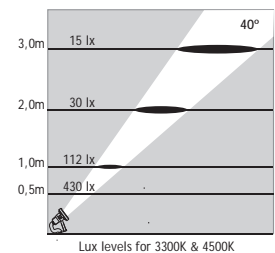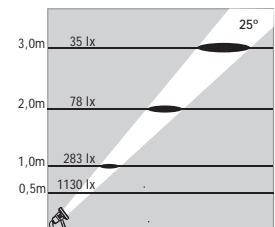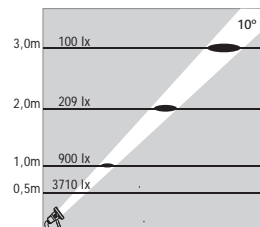

1 x 700 mA (3 W) LED


		Total Lighting Output	Code No
Warm White	3300 K	83 lm	421271
Natural White	4500 K	83 lm	421272
Cool White	6000 K	126 lm	421273
Blue			421274
Red			421275
Amber			421276
Green			421277

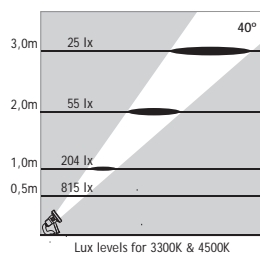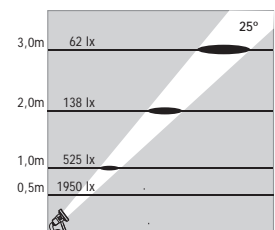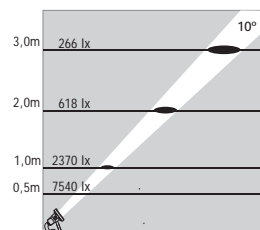

Available also with stainless steel picket for ground mounting



ATLANTIS 2

NEAR WATER LED SPOTS IP67 IK10







Voltage : 24V AC or DC
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

3 x 350 mA (3 W) LED		Total Lighting Output	Code No
Warm White	3300 K	142 lm	412291
Natural White	4500 K	142 lm	412296
Cool White	6000 K	217 lm	412297
Blue			412292
Red			412293
Amber			412294
Green			412295

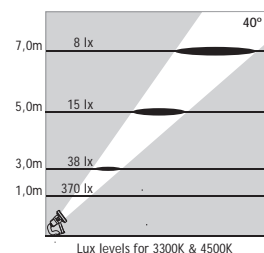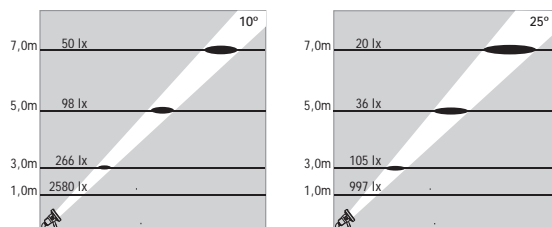

3 x 700 mA (9 W) LED		Total Lighting Output	Code No
Warm White	3300 K	256 lm	421381
Natural White	4500 K	256 lm	421382
Cool White	6000 K	391 lm	421383
Blue			421384
Red			421385
Amber			421386
Green			421387

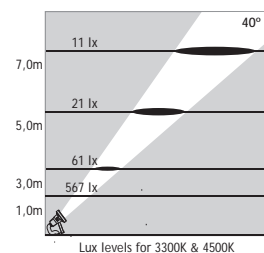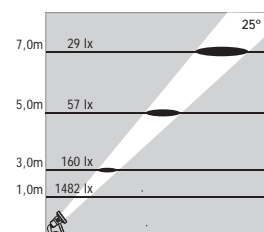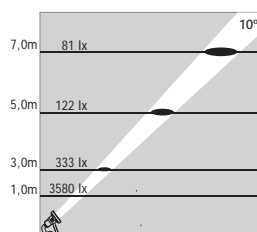


Available also with stainless steel picket for ground mounting

ATLANTIS 2




NEAR WATER LED SPOTS

Class III IP67 IK10







Voltage : 24V AC or DC
 Lens : 10°, 25°, 40°
 Diffuser : 8 mm Clear Glass (Frosted Glass on request)
 Cable : Potted 5 m 2x0,75 H03 VV-F

3 x 350 mA (3 W) LED		Total Lighting Output	Code No
Warm White	3300 K	142 lm	421391
Natural White	4500 K	142 lm	421392
Cool White	6000 K	217 lm	421393
Blue			421394
Red			421395
Amber			421396
Green			421397

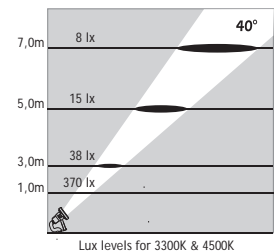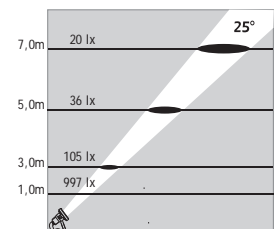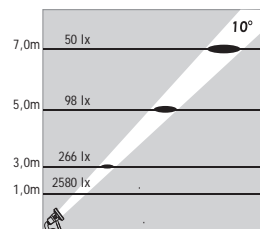


3 x 700 mA (9 W) LED		Total Lighting Output	Code No
Warm White	3300 K	256 lm	421401
Natural White	4500 K	256 lm	421402
Cool White	6000 K	391 lm	421403
Blue			421404
Red			421405
Amber			421406
Green			421407

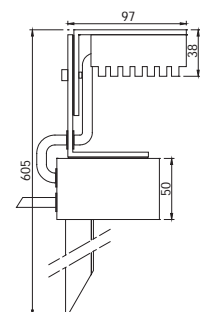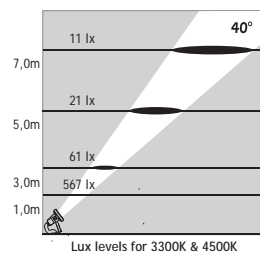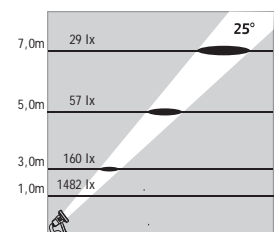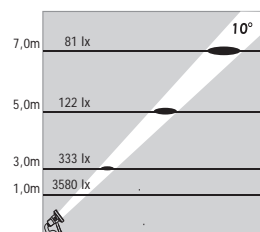

Available also with stainless steel picket for ground mounting

ATLANTIS 2

NEAR WATER RGB LED SPOT Class III IP67 IK10




Voltage : 40V DC
 Lens : 25°, 40°
 Diffuser : 8 mm Clear Glass (Frosted Glass on request)
 Cable : Potted 10 m 4x0,75 H03 VV-F



9 x 350 mA (9 W) RGB LED



Code No
412301




Available also with stainless steel picket
for ground mounting



ATLANTIS 2

NEAR WATER RGB LED SPOT Class III IP67 IK10




- Voltage : 40V DC
- Lens : 25°, 40°
- Diffuser : 8 mm Clear Glass (Frosted Glass on request)
- Cable : Potted 10 m 4x0,75 H03 VV-F



9 x 350 mA (9 W) LED



Code No
412411

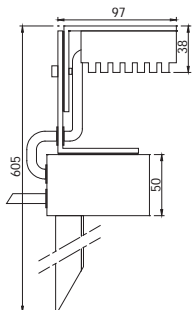


Available also with
stainless steel picket
for ground mounting

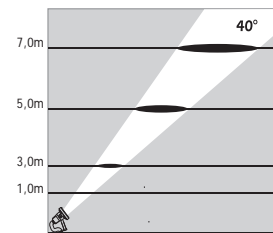

ATLANTIS 3




NEAR WATER LED SPOTS

Class III IP67 IK10







Voltage : 24V AC or DC
 Lens : 10°, 25°, 40°
 Diffuser : 8 mm Clear Glass (Frosted Glass on request)
 Cable : Potted 5 m 2x0,75 H03 VV-F

6 x 350 mA (6 W) LED		Total Lighting Output	Code No
Warm White	3300 K	274 lm	421501
Natural White	4500 K	274 lm	421502
Cool White	6000 K	421 lm	421503
Blue			421504
Red			421505
Amber			421506
Green			421507

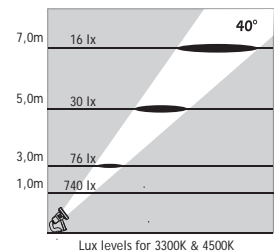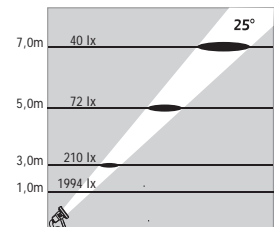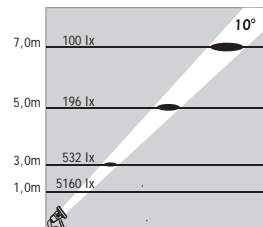

6 x 700 mA (18 W) LED		Total Lighting Output	Code No
Warm White	3300 K	493 lm	421511
Natural White	4500 K	493 lm	421512
Cool White	6000 K	758 lm	421513
Blue			421514
Red			421515
Amber			421516
Green			421517

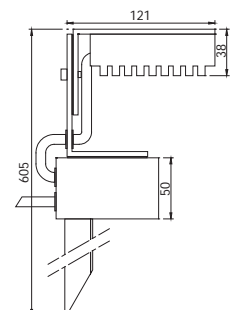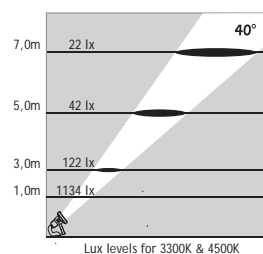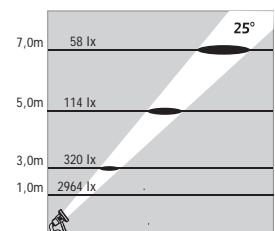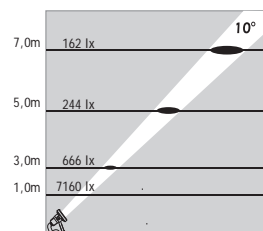


Available also with stainless steel picket for ground mounting

ATLANTIS 4




NEAR WATER LED SPOTS

Class III IP67 IK10







Voltage : 24V AC or DC
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

9 x 350 mA (9 W) LED		Total Lighting Output	Code No
	Warm White 3300 K	449 lm	421601
	Natural White 4500 K	449 lm	421602
	Cool White 6000 K	680 lm	421603
	Blue		421604
	Red		421605
	Amber		421606
	Green		421607

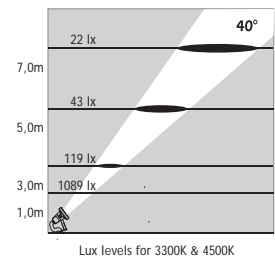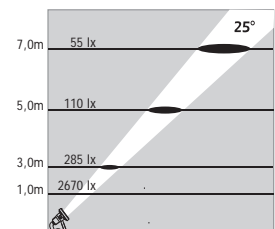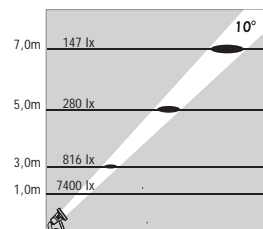

9 x 700 mA (27 W) LED		Total Lighting Output	Code No
	Warm White 3300 K	808 lm	421611
	Natural White 4500 K	808 lm	421612
	Cool White 6000 K	1224 lm	421613
	Blue		421614
	Red		421615
	Amber		421616
	Green		421617

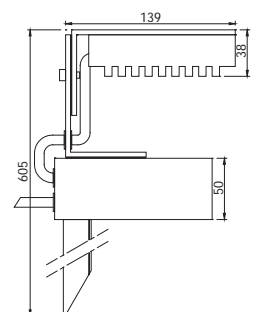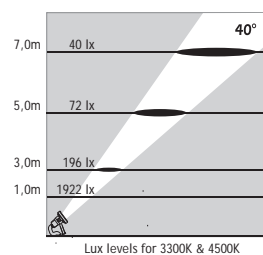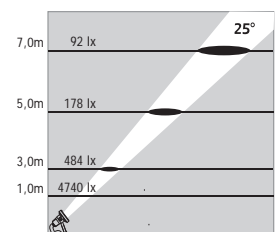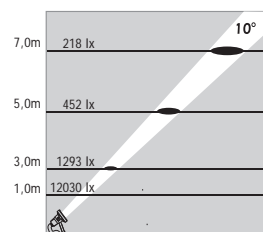


Available also with stainless steel picket for ground mounting

ATLANTIS 5



NEAR WATER LED SPOTS

Class III IP67 IK10



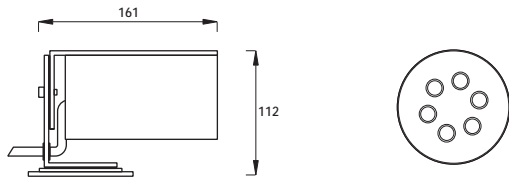


Voltage : 24V AC or DC on request
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

6 x 350 mA (6 W) LED		Total Lighting Output	Code No
Warm White	3300 K	274 lm	412311
Natural White	4500 K	274 lm	412316
Cool White	6000 K	421 lm	412317
Blue			412312
Red			412313
Amber			412314
Green			412315

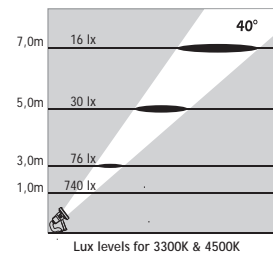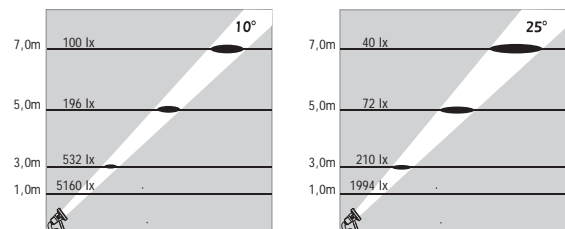



6 x 700 mA (18 W) LED		Total Lighting Output	Code No
Warm White	3300 K	493 lm	421961
Natural White	4500 K	493 lm	421962
Cool White	6000 K	758 lm	421963
Blue			421964
Red			421965
Amber			421966
Green			421967

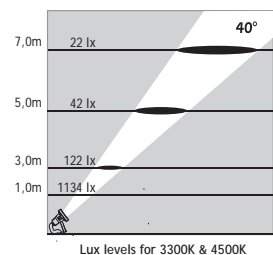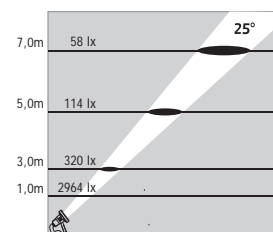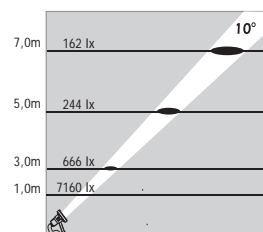

ATLANTIS 5




NEAR WATER LED SPOTS

Class III IP67 IK10



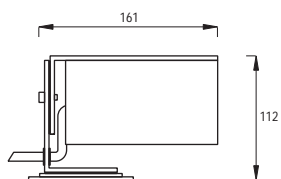


Voltage : 24V AC or DC on request
Lens : 10°, 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 5 m 2x0,75 H03 VV-F

9 x 350 mA (9 W) LED		Total Lighting Output	Code No
Warm White	3300 K	449 lm	412321
Natural White	4500 K	449 lm	412326
Cool White	6000 K	680 lm	412327
Blue			412322
Red			412323
Amber			412324
Green			412325

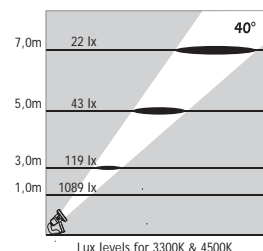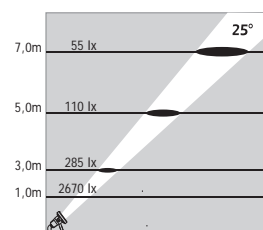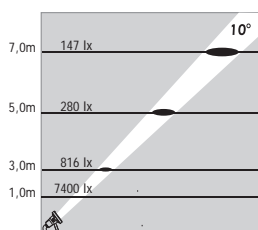


9 x 700 mA (27 W) LED		Total Lighting Output	Code No
Warm White	3300 K	808 lm	421951
Natural White	4500 K	808 lm	421952
Cool White	6000 K	1224 lm	421953
Blue			421954
Red			421955
Amber			421956
Green			421957

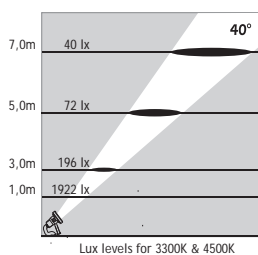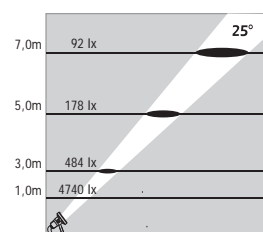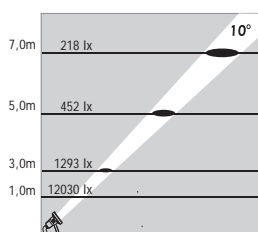

Available also with stainless steel picket for ground mounting

ATLANTIS 27

NEAR WATER RGB LED SPOT
Class III IP67 IK10



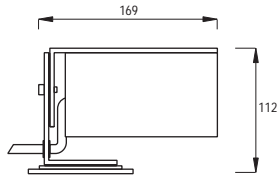


Voltage : 40V DC
Lens : 25°, 40°
Diffuser : 8 mm Clear Glass (Frosted Glass on request)
Cable : Potted 10 m 4x0,75 H03 VV-F

27 x 350 mA (30 W) RGB LED



Code No
412331

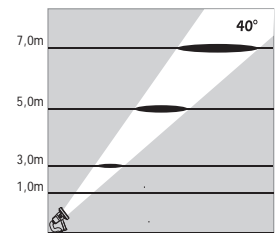



Available also with
stainless steel picket
for ground mounting

ATLANTIS 5

NEAR WATER LED SPOT




Class III IP67 IK10



Voltage : 24V AC or DC
 Lens : 10°, 25°, 40°
 Diffuser : 8 mm Clear Glass (Frosted Glass on request)
 Cable : Potted 5 m 2x0,75 H03 VV-F





6 x 350 mA (6 W) LED

Color	Temp (K)	Total Lighting Output (lm)	Code No
Warm White	3300 K	274 lm	412341
Natural White	4500 K	274 lm	412346
Cool White	6000 K	421 lm	412347
Blue			412342
Red			412343
Amber			412344
Green			412345

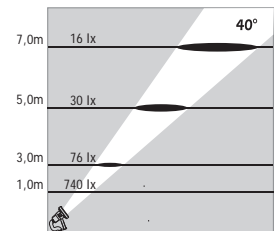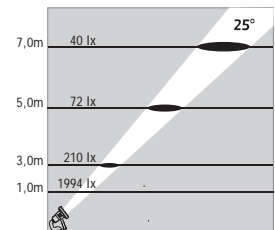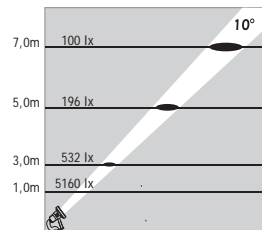

6 x 700 mA (18 W) LED

Color	Temp (K)	Total Lighting Output (lm)	Code No
Warm White	3300 K	493 lm	421971
Natural White	4500 K	493 lm	421972
Cool White	6000 K	758 lm	421973
Blue			421974
Red			421975
Amber			421976
Green			421977

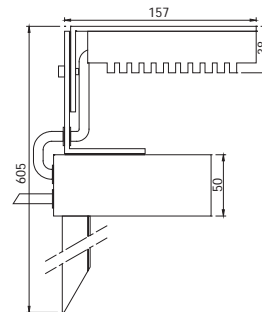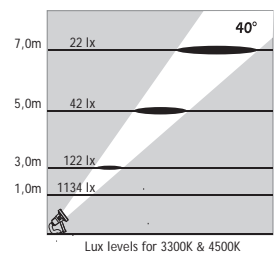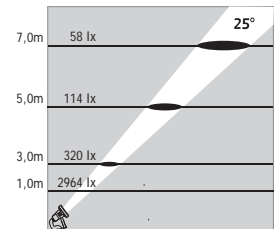
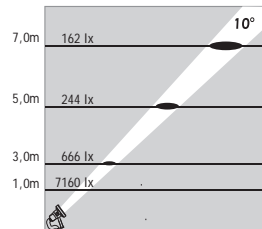


Available also with stainless steel picket for ground mounting

ATLANTIS 5




NEAR WATER LED SPOT

Class III IP67 IK10







Voltage : 24V AC or DC
 Lens : 10°, 25°, 40°
 Diffuser : 8 mm Clear Glass (Frosted Glass on request)
 Cable : Potted 5 m 2x0,75 H03 VV-F

9 x 350 mA (9 W) LED		Total Lighting Output	Code No
	Warm White 3300 K	449 lm	412351
	Natural White 4500 K	449 lm	412356
	Cool White 6000 K	680 lm	412357
	Blue		412352
	Red		412353
	Amber		412354
	Green		412355

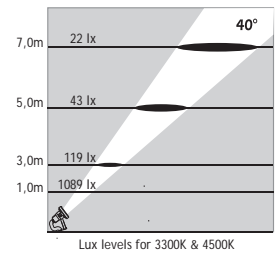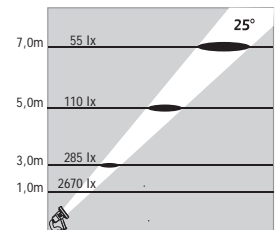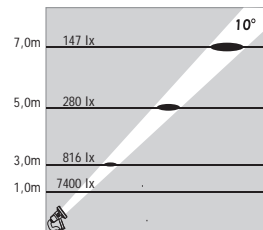


9 x 700 mA (27 W) LED		Total Lighting Output	Code No
	Warm White 3300 K	808 lm	421981
	Natural White 4500 K	808 lm	421982
	Cool White 6000 K	1224 lm	421983
	Blue		421984
	Red		421985
	Amber		421986
	Green		421987

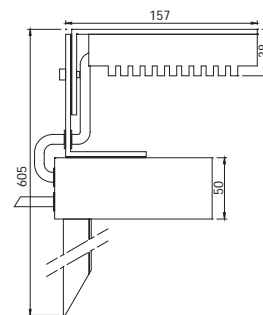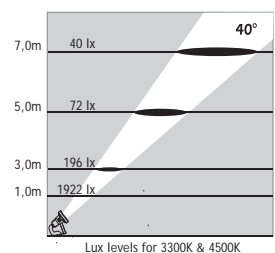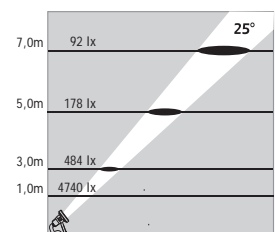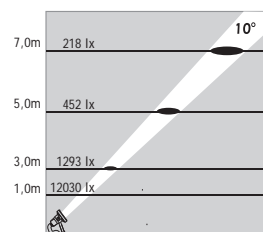

Available also with stainless steel picket for ground mounting

ATLANTIS 27

NEAR WATER RGB LED SPOT
Class III IP67 IK10




- Voltage : 40V DC
- Lens : 25°, 40°
- Diffuser : 8 mm Clear Glass (Frosted Glass on request)
- Cable : Potted 10 m 4x0,75 H03 VV-F

27 x 350 mA (30 W) RGB LED



Code No
412361

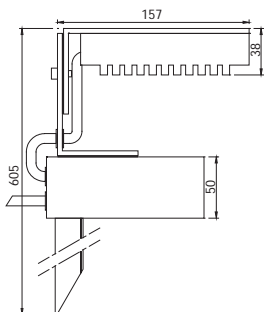

Available also with
stainless steel picket
for ground mounting

